

TS-900 INSTALLATION AND CONFIGURATION MANUAL



CONTENTS

Contents	2
Introduction	3
Features	3
What should be shipped.....	4
Standard Parts	4
Optional Parts.....	4
Technical Specification	5
System Overview	6
TS-900-GPS.....	6
GPS Antenna.....	7
Wiring the unit	8
Extending the antenna with Cat5e/Cat6 Cable	8
Extending the antenna with eight - Core Cable.....	9
Setting up the Unit	10
Connecting everything up	10
Server Location.....	10
Connect to Network.....	10
Install Antenna	10
Connecting the Server to the Antenna.....	10
Troubleshooting	11
Technical Support.....	12
Support Website.....	12
Warranty and Maintenance	14
Warranty	14
Technical Support, Repair and Returns	14



INTRODUCTION

The TS-900-GPS Network Time Server solution consists of a GPS clock, GPS antenna and TimeSync software. The GPS clock is attached to Windows Server, Windows NT, 2000, or 2003 Server or a Windows XP workstation and the supplied TimeSync software once installed configures the machine as a Stratum 1 NTP time server. A two line display on the TS-900 unit shows run-time information for the GPS subsystem and UTC time.

Sitting safely behind your company firewall the TS-900 provides an elegant network timing solution allowing a Windows Server or a Domain Controller to supply accurate, secure UTC time to any other machine or digital clock on your network.

FEATURES

- Installs as a service on a Windows Server adding Stratum 1 NTP Time Server functionality.
- Supports NTP and SNTP compatible clients.
- Front panel display to easily assess time and satellite status.
- GPS active antenna + 10m cable.
- Extension box and wiring tool included – GPS antenna cable length can be extended up to 1,000m



WHAT SHOULD BE SHIPPED

STANDARD PARTS

- TS-900 unit + Power lead
- Instruction Manual
- GPS antenna (with a 10m/8 core cable) + Power supply
- Junction Box and IDC Cable Tool
- CD containing manual and software

OPTIONAL PARTS

- Lightning Arrestor(s)
- Gold and Premium Support
- Digital Wall Clock - Ethernet Powered
- Antenna Cable - Available from 100 to 1,000 metre rolls
- Additional Power Supply - Recommended from 550 metres onwards
- Additional Software Licenses (available from 5 to 300+ clients)



TECHNICAL SPECIFICATION

Type of receiver	Active Antenna GPS 12 channel
Mounting (Unit)	19" (2U) Rackmount
Mounting (Antenna)	Wall mounting bracket
Display	LCD, 2 x 20 characters, with backlight
Network Interface	Via a Windows server or workstation
Interface to Server	RS232 serial interface
Power supply	85 - 260V, 47 - 63Hz
Working Temperature	0 - 50°C / 32 - 122°F
Working Humidity	Max. 85%
Timing Accuracy	Network: +/- 20 milliseconds, typical GPS: 1 microseconds, relative to UTC
Signal (GPS) Accuracy	<1 μ s, relative to GPS



SYSTEM OVERVIEW

TS-900-GPS

The TS-900-GPS Network Time Server solution consists of a GPS clock, GPS antenna and TimeSync software. The GPS clock is attached to Windows Server, Windows NT, 2000, or 2003 Server or a Windows XP workstation and the supplied TimeSync software once installed configures the machine as a Stratum 1 NTP time server. A two line display on the TS-900 unit shows run-time information for the GPS subsystem and UTC time.

Sitting safely behind your company firewall the TS-900 provides an elegant network timing solution allowing a Windows Server or a Domain Controller to supply accurate, secure UTC time to any other machine or digital clock on your network.



GPS ANTENNA

Tracking up to 12 satellites at the same time, GPS offers an accurate signal capable of a reliable and consistent reading anywhere in the world. Used extensively for synchronising time from one location to another, GPS signals are received globally and maintain a high level of accuracy.

Functional up to 1000m (3,000 ft.) away from the time server, additional cable length can be added to the supplied 10m to increase cable size to desired length. An extra power supply is recommended past the length of 550m to ensure the unit is running at optimum efficiency.

The GPS antenna is encased in a weatherproof IP65 enclosure and should be mounted on the roof of a building with a 180-degree view of the sky.

The antenna can be mounted to the side of the building; however, limiting the view of the sky will have an effect on the units' ability to synchronise. Units mounted to the side of the building will experience short periods of time where the antenna is unable to see the three satellites required to achieve synchronisation.

Some things to avoid are older computer monitors, switch mode power supplies and air conditioning units.

The GPS antenna uses eight-core signal cable and will function on a cable run of up to 550 metres drawing power from the rack-mount unit, if you require the antenna to have an extended cable run of up to 1,000 metres then a power supply is required. This power supply feeds directly into the GPS antenna and as such, would need to be located on the roof too. In most cases however, 550 metres is more than adequate.



The Operating temperature for the antenna is -40 Celsius to +85 Celsius so it may be worth noting that the temperature inside the enclosure can be considerably different from the external temperature, especially when the antenna is located in a position where it is in direct sunlight.

When mounting a GPS antenna it may be worth noting that satellites dishes can have a negative effect on the unit, it's best to keep the GPS antenna at least ten metres from them.



WIRING THE UNIT



EXTENDING THE ANTENNA WITH CAT5E/CAT6 CABLE

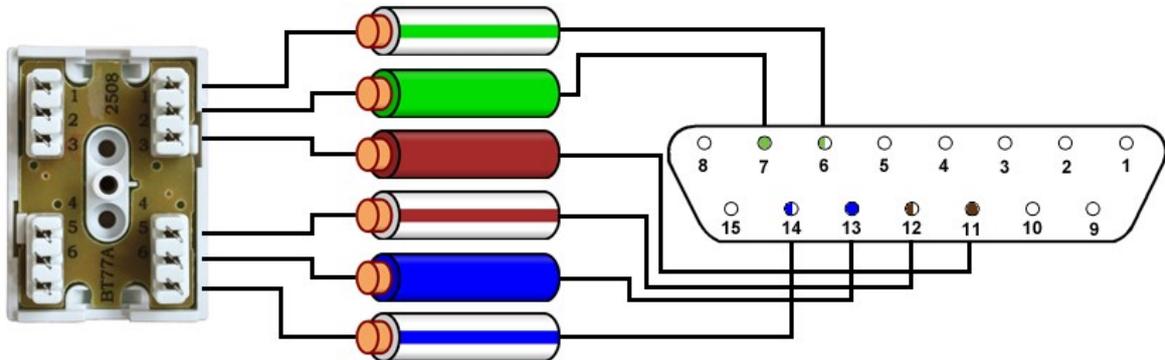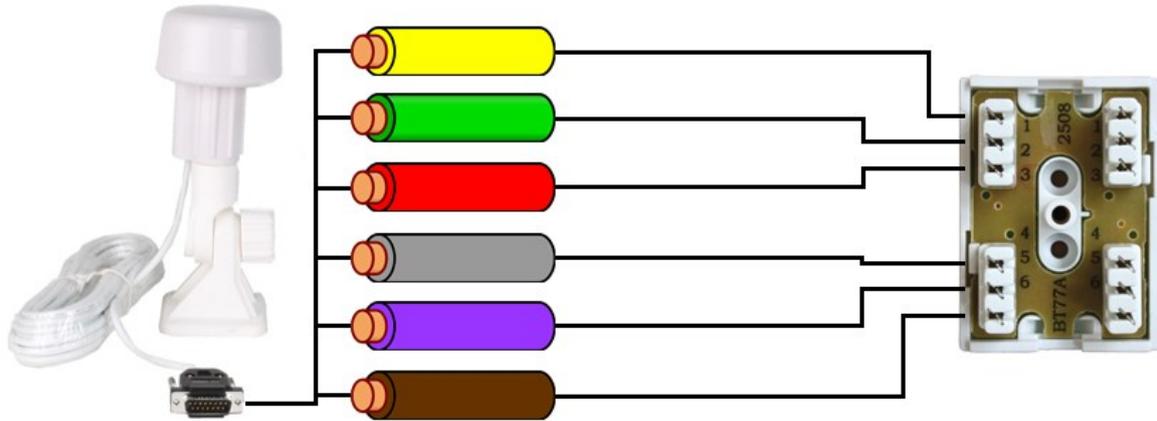

15 Way D-Type Pin	Cable Colour
6	Green/White
7	Green
11	Brown
12	Brown/White
13	Blue
14	Blue/White



EXTENDING THE ANTENNA WITH EIGHT - CORE CABLE

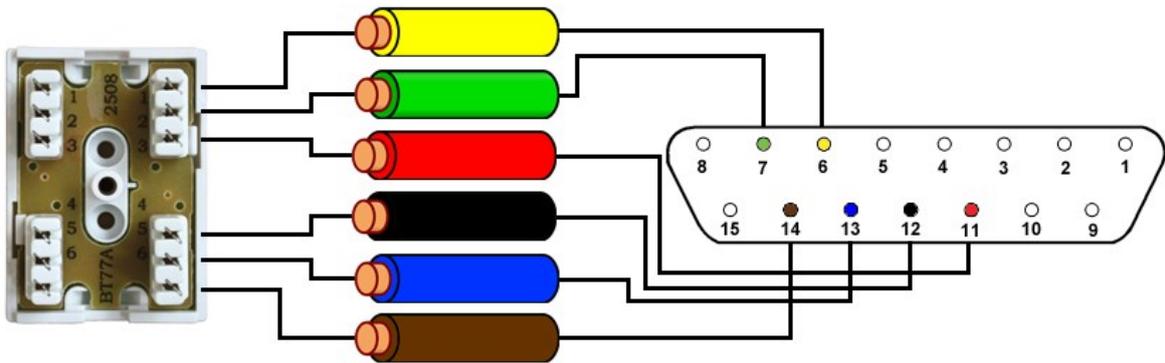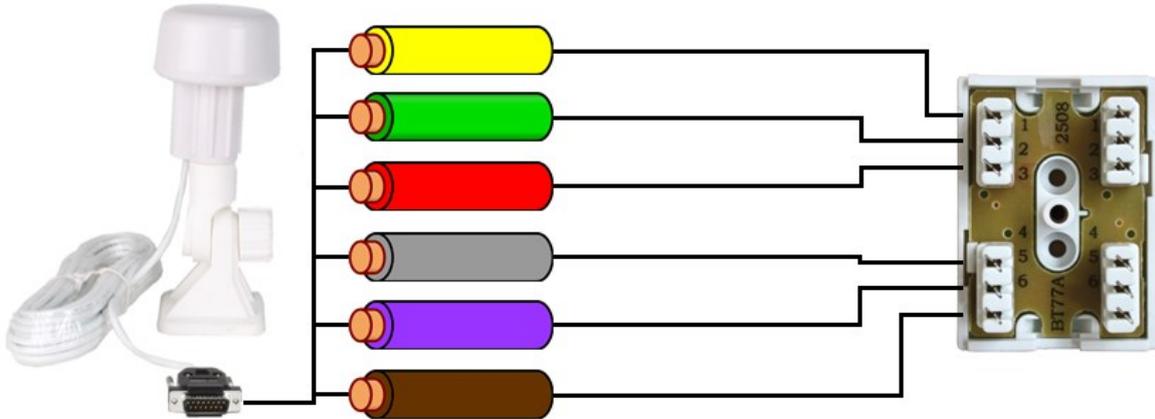

15 Way D-Type Pin	Cable Colour
6	Yellow
7	Green
11	Red
12	Black
13	Blue
14	Brown



SETTING UP THE UNIT

CONNECTING EVERYTHING UP

Server Location

Choose a suitable location for the TS-900-GPS; please bear in mind you will need to run a cable from this location preferably to the roof of the building or to a window.

Connect to Network

Connect the TS-900-GPS to a Computer via the Serial RS232 cable or the USB adapter cable. Connect the computer to the network using a standard RJ-45 cable.

Install Antenna


Choose an area to mount the GPS Antenna; the ideal place would be the roof of the building with a clear view of the sky. Things to avoid are air conditioning units and power distribution units, as these will cause electrical interference.

Please note that if you are extending the cable to a length of 550m or greater, then you will need an extra power source, located either on the roof or can be accessed from the roof.

Connecting the Server to the Antenna

The cable should be run from the rack mount enclosure to the selected mounting position.

Please note that it is a good idea to leave some slack cable in case you need to move the unit later. Also the maximum cable length should not exceed 1000m.

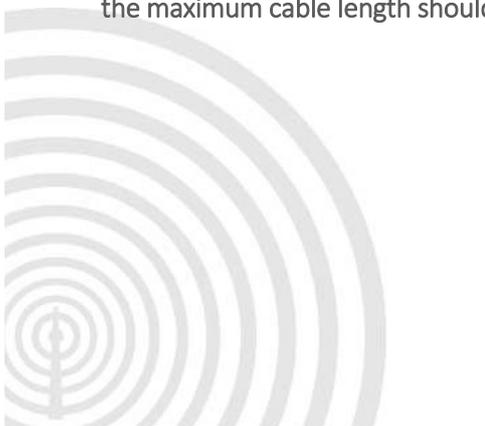

TROUBLESHOOTING

Use this section to quickly troubleshoot minor issues or common problems.

For any further support, please contact us using our Support Website, which can be found at:

galleonsupport.com

Q) The GPS Unit cannot see enough satellites. What can be done to improve this?

A) The ideal location for the GPS Antenna is the on the roof of the building with a 180° view of the sky. Although it may work on a window ledge, the view of the sky will be significantly smaller which could result in the loss of communication with the satellites.

Q) Can the cabling for the antenna be taken across the existing CAT5 cabling structure in our building?

A) Yes, the GPS antenna can be taken across CAT5 / UTP cabling, however, the cabling must be 'point-to-point' and cannot pass through routers, hubs, or switches.

Q) What type of cable should I use for extending the GPS antenna to 1000m?

A) The GPS antenna uses standard unscreened eight-core cable. In most cases, this is adequate; however, in some cases screened cable may be required.

Note: The cabling is often referred to as 'eight-core alarm cable'.




TECHNICAL SUPPORT

SUPPORT WEBSITE


Should you require any Technical Support on this product, please go to galleonsupport.com where you can find access to the Knowledgebase, for general information.

For any further questions please submit a ticket detailing the problems or technical issues you are having, and a member of the Technical Support Team will be available to support you. When submitting a ticket, please give as much information as possible.

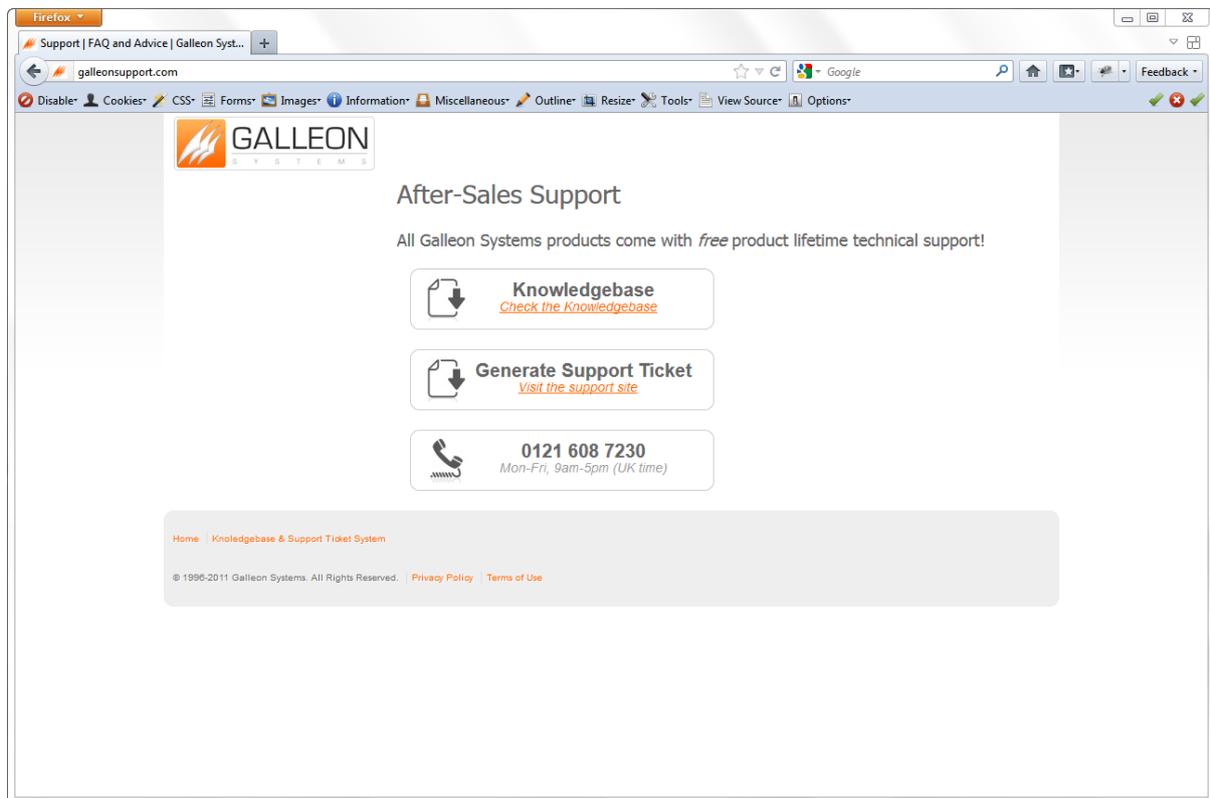


galleonsupport.com website with Knowledgebase and Support Ticket links.



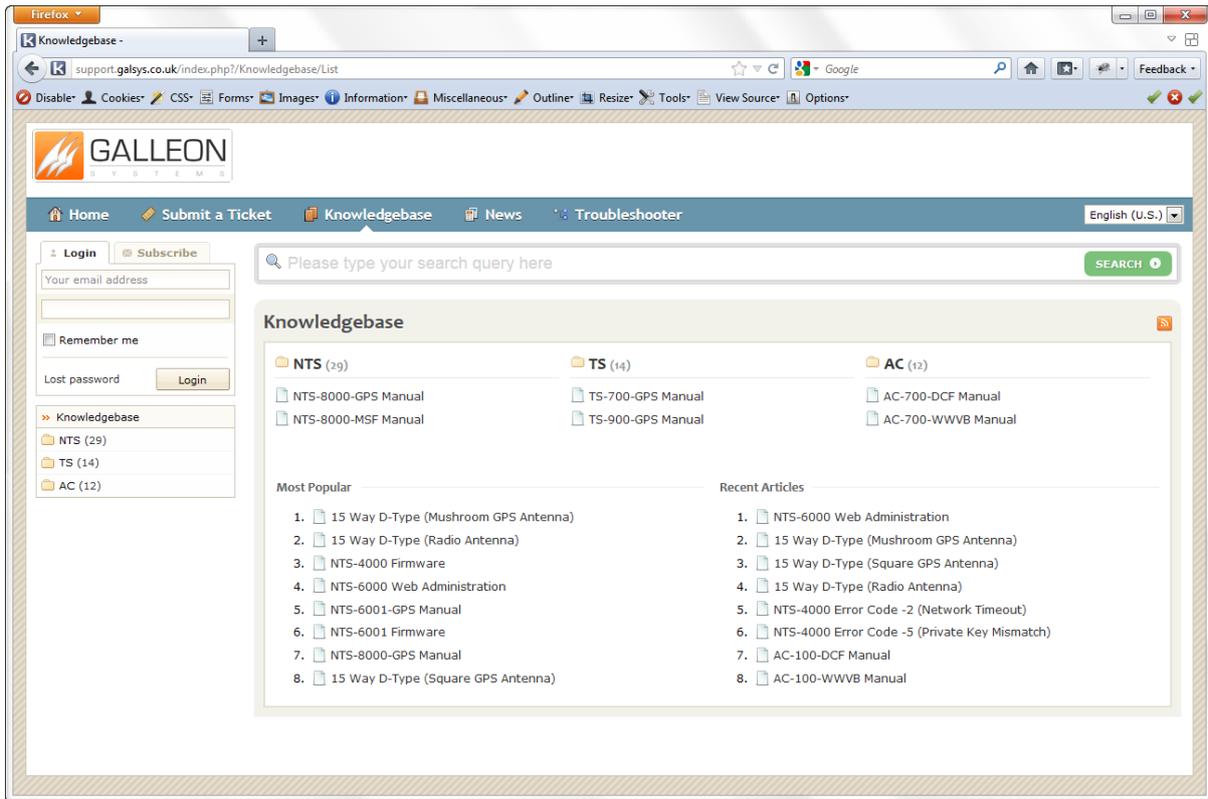

The Technical Support Knowledgebase.

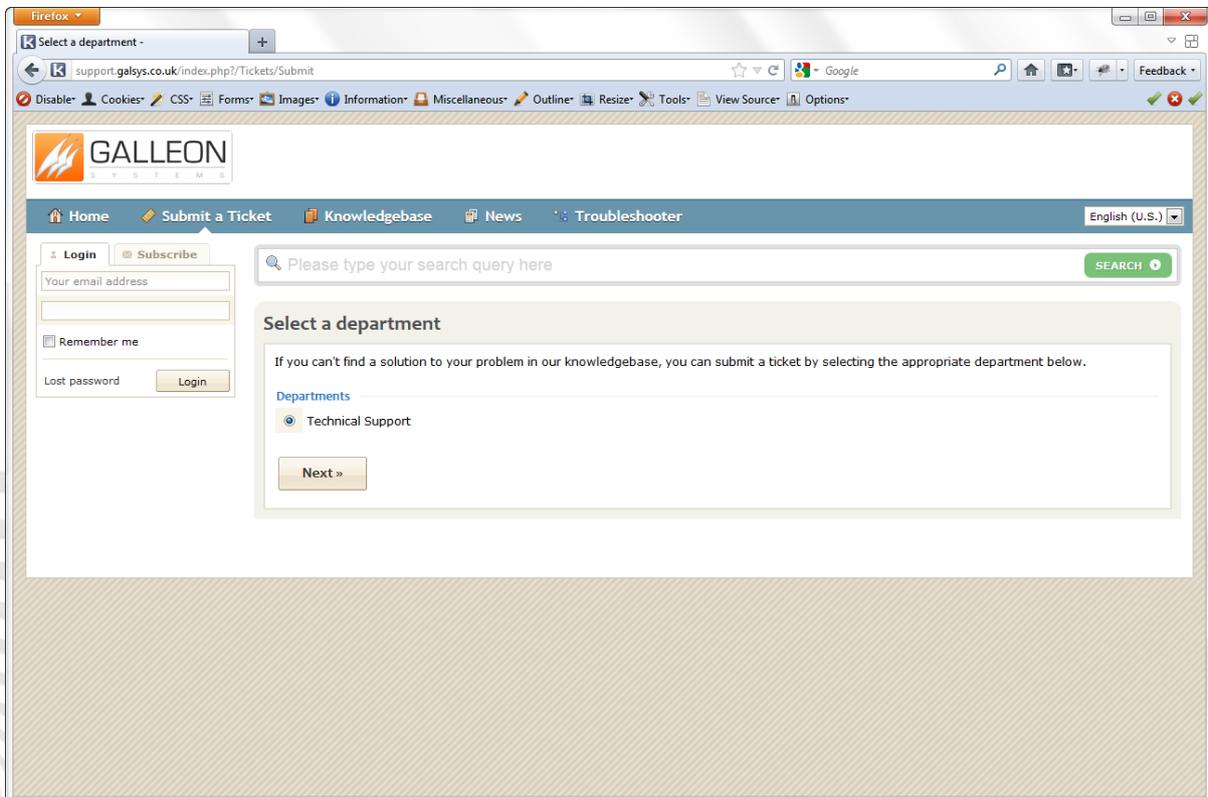

The Technical Support Ticket System.



TS-900-GPS

WARRANTY AND MAINTENANCE

WARRANTY

Galleon Systems warrants the time server to be free from defects in material and workmanship during a three-year period. The Warranty begins on the date the unit is shipped from Galleon Systems. Extended warranties are available by speaking to the Galleon Systems Sales Team.

Galleon Systems' liability under this Warranty is limited to repairing or replacing, at Galleon systems' option, the defective equipment and providing upgrade version changes for firmware. In case of repair, the product must be returned to Galleon systems.

This Warranty does not apply if repairs are required due to acts of nature beyond Galleon systems' control such as, but not limited to, lightning strikes, power surges, misuse, damage, neglect, or if repairs/modifications have been made or attempted by anyone other than personnel authorised by Galleon Systems.

In no event will Galleon Systems be liable for any indirect, special, incidental or consequential damages from the sale or use of this product.

This disclaimer applies both during and after the term of the warranty. Galleon Systems disclaims liability for any implied warranties, including implied warranties of merchantability and fitness for a specific purpose.

TECHNICAL SUPPORT, REPAIR AND RETURNS

To obtain any Technical Support with this product, contact Galleon Systems via the Support Website – galleonsupport.com

If throughout the Technical Support process it is deemed that you need to send any products back for repair, we will issue a Return Material Authorisation (RMA) Number and shipping instructions. Then ship the product, transportation prepaid, for inspection.

Typical Equipment repair or replacement time is five (5) business days, plus shipping times. One-way shipping is the customer's responsibility. Galleon Systems will return ship the equipment by the same means it was received.

Galleon Systems will not be responsible for unauthorised returns or for returns that do not list the RMA Number on a packing list attached in plain view on the outside of the shipping container.

